

Dolomiti W Decking

Water-based protective finish for outdoor decking and wooden structures



Water-based finish impregnating varnish, available in the colorless or colored version, suitable for protecting outside decks from the wear of time, giving the wood an excellent level of finish with maximum protection and color resistance, highlighting its natural grain and veins. The high elasticity, penetration capacity, impermeability and wear resistance guarantee a high protection of the finish even in conditions of strong exposure to atmospheric agents and sunlight.

Intended for the protection of structures located outside bathing establishments, private villas, playgrounds and resorts with structures such as decks, garden furniture, children's games, gazebos, benches, beams and frames and wooden structures of all kinds.

linea **NOVOLEGNO**



LONG-LASTING PROTECTION
MAXIMUM DURATION OF THE COLOR
OUTSIDE



HIGH RESISTANCE TO
ATMOSPHERIC AGENTS
HIGH PROTECTION FROM UV RAYS
HIGH ADHESION IN HUMID
ENVIRONMENTS
EXCELLENT RESISTANCE TO WATER



HOMOGENEOUS FINISH
HIGHLIGHTS THE NATURAL GRAIN
OF THE WOOD



NO NEED FOR PRIMER
EXCELLENT DISTENSION AND
COVERAGE
EASY TO APPLY, NON-DRIP
EASY MAINTENANCE



ARREGHINI®
ITALIAN PAINTS SINCE 1950

Dolomiti W Decking

Water-based protective finish for decking and exterior wooden structures

COMPOSITION

Water-based product based on acrylic and alkyd resins along with restorative oils and transparent iron oxides.

CHARACTERISTICS

Dolomiti W Decking it penetrates deeply into the wood, strengthening the fibers and increasing their resistance to mechanical stress. Suitable for long-lasting outdoor and indoor applications on new or older structures in need for maintenance.

FIELD OF APPLICATION

It is suitable for the decoration and protection of exterior wooden structures from harsh atmospheric agents. Applicable on all types of larch products (Austrian larch, Siberian etc.). It can be spread both horizontally and vertically. Its extreme versatility makes it suitable for both professional and DIY use.

AESTHETIC EFFECT

Resistant to UV rays, it highlights the grain

of the wood with a compact and luminous aesthetic effect. The wood remains porous and breathable, avoiding chipping or flaking. Characterized by excellent flow and low tendency to dripping, it allows for a uniform thicknesses with excellent coverage of the edges and on aesthetically homogeneous finish.

TECHNICAL CHARACTERISTICS OF THE PRODUCT

APPLICATION	brush, roller, spray
SUBSTRATE	rough or pretreated wood, preliminary sanding
COVERAGE	12-14 m ² /l per layer, depending on the absorption of the product
GLOSS	mat
DRYING TIME	overcoat 12h, complete 5 days
THINNING	ready to use
APPLICATION CONDITIONS	+15°C +30°C, air humidity below 65%

For further information regarding the product and its application cycle please consult the product TDS downloadable on the www.caparreghini.it website.

COLOURS IN STOCK




070 W INCOLORE



027 W NOCE



078 W QUERCIA

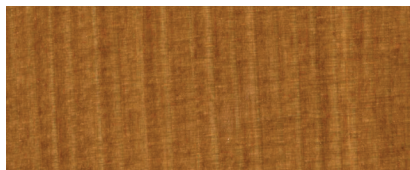

080 W CASTAGNO

*The product can be made in all the colors in the Novolegno water-based color chart. The color chart is available at Cap Arreghini retailers.

PACKAGING: 0.750L – 2.5L



CAP ARREGHINI SpA - ITALIAN PAINTS SINCE 1950
V.le Pordenone, 80 - 30026 PORTOGRUARO (VE)
Tel. +39 0421 278111 - Fax +39 0421 278115
info@caparreghini.it - www.caparreghini.it
Azienda con Sistema Certificato UNI EN ISO 9001 - UNI EN ISO 14001

Follow us on



www.caparreghini.it


made in Italy